



Epoxy Non-skid Paint

永保新止滑劑



ISO 9001:2000
Cert. No. 01 100 6507

Product No. : #1023

產品編號 : #1023

General Description :

The paint based on the Epoxy resin, hardener and quartz sand.

一般說明:

由環氧樹脂,硬化劑及矽砂構成之塗料.

Uses :

For concrete substrate of beverage, food manufactories, chemical plants, assembly plants, repair plants, food manufactories, garage, abattoir, marine deck, oil drilling plate form an industrial facilities etc.

用途:

飲料廠, 化工廠, 裝配廠, 食品廠, 車庫, 屠宰場, 冷凍倉庫, 大型廚房等水泥地面及船舶甲板, 鑽油平台, 工業設施等鋼鐵面之地板.

Characteristics :

1. Anti-slip, anti-skid and abrasive resistance.
2. Seamless, impermeable and very good chemical resistance.
3. Excellent mechanical strength.
4. Excellent adhesion, no cracking and peeling.
5. Unaffected by temperature difference.

特點:

1. 止滑, 耐磨, 防溜
2. 無縫, 不滲透, 抗化學藥品強
3. 機械性能特優, 耐車輛之輾壓
4. 與金屬及水泥面接著力強, 不龜裂, 不剝落
5. 不受冷熱溫差之影響而變形

Color-Availability :

Natural colors.

可調配顏色:

天然色

Technical Data :

Finish

光澤

Weight

重量

Viscosity (25 °C)

黏度 (25 °C)

Drying Time (25 °C, RH=60%)

乾燥時間 (25 °C, RH=60%)

Optimum Film Thickness

漆膜厚度

Pot Life (25 °C)

可用時間 (25 °C)

Theoretical Coverage

理論塗佈量

Stock Shelf Life

貯藏安定性

技術資料:

Paste

膏狀

Above 1.1 Kg/ L (resin mixture)

1.1 公斤/公升以上 (樹脂混合物)

Paste

膏狀

within 6 hrs

6 小時以內

within 12 hrs

12 小時以內

7 days

7 天

Set-to-touch

指觸

Dry hard

堅膜

Fully cured

完全硬化

Wet

濕膜

Dry

乾膜

1.5 mm and 2 mm

1.5 m/m (噴壺法) 及

2 m/m (手撒法)

30 min.

30 分鐘

3.0 Kg/m² (1.5 mm); 4.0 Kg/m² (2 mm)

3.0 公斤/平方米 (噴壺法);

4.0 公斤/平方米 (手撒法)

Minimum 1 year under normal storage conditions.

正常情況下, 至少1年



虹牌油漆


TAI HING HONG 大興行Main Office:
G/F., 103 Shek Pai Wan Road, Aberdeen, Hong Kong
Tel.: (852) 2873 3078 Fax: (852) 2873 4953Sheung Wan Office:
Unit 1906, 19/F., Bonham Trade Centre,
50 Bonham Strand East, Sheung Wan, Hong Kong
Tel.: (852) 2850 8518 Fax: (852) 2850 8515
Email: paints@taihinghong.biz.com.hk

Material Handling :

1. Thinner is only used for cleaning tools.
2. Mix base and hardener thoroughly.
3. Avoid applying the paint in rainy weather or relative humidity exceed 85% RH.
4. Concrete substrate must be compress strength over 150 Kg/cm², and free from oily, sand and dust.
5. Wear gloves to avoid touching skin, when applying.

注意事項:

1. 調薄劑僅供清洗工具, 不可加入其中使用
2. 主劑及硬化劑須充分攪拌均勻
3. 陰雨, 潮濕氣候或大氣相對濕度在85% RH以上時避免施工
4. 水泥面強度至少150Kg/cm²以上, 不可有油漬, 砂粒或灰塵
5. 施工時請戴手套, 以避免皮膚接觸

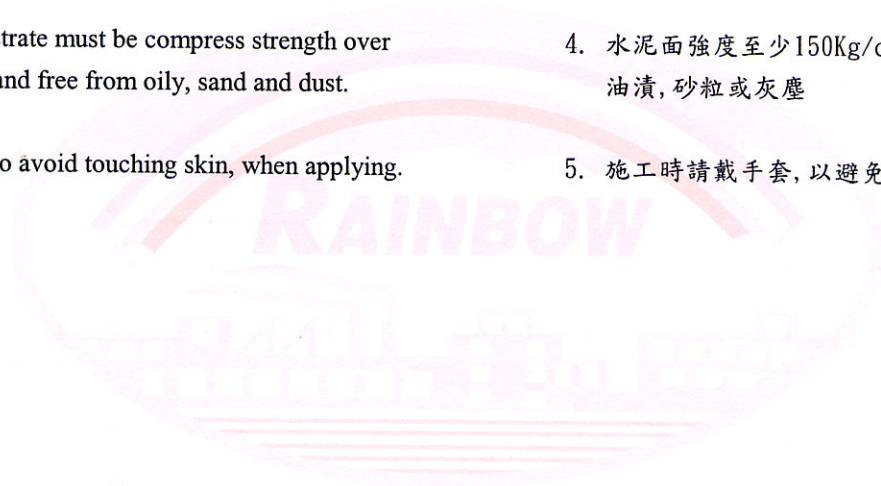

虹牌油漆

TAI HING HONG 大興行

Main Office:
G/F., 103 Shek Pai Wan Road, Aberdeen, Hong Kong
Tel.: (852) 2873 3078 Fax: (852) 2873 4953

Sheung Wan Office:
Unit 1906, 19/F., Bonham Trade Centre,
50 Bonham Strand East, Sheung Wan, Hong Kong
Tel.: (852) 2850 8518 Fax: (852) 2850 8515
Email: paints@taihingong.biz.com.hk

