



Water-based Epoxy Clear Primer/Sealer

水性環氧樹脂透明底漆



Product No. : #1030CP

產品編號 : #1030CP

General Description :

A two-pack, water-based clear primer/sealer based on Epoxy Resin and special hardener.

一般說明:

由水性環氧樹脂及特殊硬化劑構成之二液型水性透明底漆。

Uses :

Water and alkalis resistant clear primer sealer for concrete wall, pipes, floor and concrete products.

用途:

水泥壁面, 水泥製品, 水泥土板, 石膏板及混凝土磚牆等防水防鹼用透明底漆。

Characteristics :

1. Excellent resistance to water, sea water and sewage. Excellent resistance to acids and alkalis.
2. Tough and hard film with very good adhesion.
3. Excellent concrete penetration. No flammable, no odor, non toxic.

特點:

1. 具有優良之耐水性, 耐鹼性。
2. 漆膜堅韌且附着力良好。
3. 與上塗有溶劑及無溶劑環氧樹脂及PU相容性非常良好。

Color-Availability :

Clear yellow liquid

可調配顏色:

微黃透明

Technical Data :**技術資料:**

Weight 重量		0.9 Kg/ L (mixture) 0.9 公斤/公升 (混合物)
Viscosity (25 °C) 黏度 (25 °C)		50 ~ 65 KU 50 ~ 65 KU
Drying Time (25 °C) 乾燥時間 (25 °C)	Set-to-touch 指觸	4 hrs 4 小時
	Dry hard 堅膜	12 hrs 12 小時
	Fully cured 完全硬化	7 days 7 天
Optimum Film Thickness 漆膜厚度	Wet 濕膜	40 microns 40 微米
	Dry 乾膜	15 microns 15 微米
Overcoating Intervals (25 °C) 塗料間隔 (25 °C)	Min. 最少	14 hrs 14 小時
	Max. 最多	--- ---
Theoretical Coverage 理論塗佈量		24.6 m ² / L; 93 m ² / Gal 24.6 平方米/公升; 93 平方米/美卡
Pot Life (25 °C) 可用時間 (25 °C)		within 1.25 hr. (mixture) 1.25 小時以內 (混合漆)
Solid by Volume 固體容積		35% above (mixture) 35% 以上 (混合漆)
Stock Shelf Life 貯藏安定性		Minimum 1 year under normal storage conditions. 正常情況下, 至少1年

**TAI HING HONG 大興行**

Main Office:
G/F., 103 Shek Pai Wan Road, Aberdeen, Hong Kong
Tel.: (852) 2873 3078 Fax: (852) 2873 4953

Sheung Wan Office:
Unit 1906, 19/F., Bonham Trade Centre,
50 Bonham Strand East, Sheung Wan, Hong Kong
Tel.: (852) 2850 8518 Fax: (852) 2850 8515
Email: paints@taihinghong.biz.com.hk





ISO 9001:2000
Cert. No. 01 100 6507

Application Data :

No. of Component(s) : Two
No. of Coat(s) : One~Two
Dilution : 0 ~ 5 % with tap water
Application Method : Spray, Brush.

使用說明：


組合成份數目 : 2
塗施層面 : 1~2
稀釋 : 0 ~ 5 % 自來水
(不含清洗工具)
塗裝方法 : 噴塗, 刷塗.

Packing Style :

1030CP Water-Based Epoxy Clear Primer/Sealer :
3.4 Kg / USG / Can
17 Kg / 5 USG / DR

包裝：

1030CP 水性環氧樹脂透明底漆：
3.4 公斤/美卡/罐
17 公斤/ 5美卡/桶

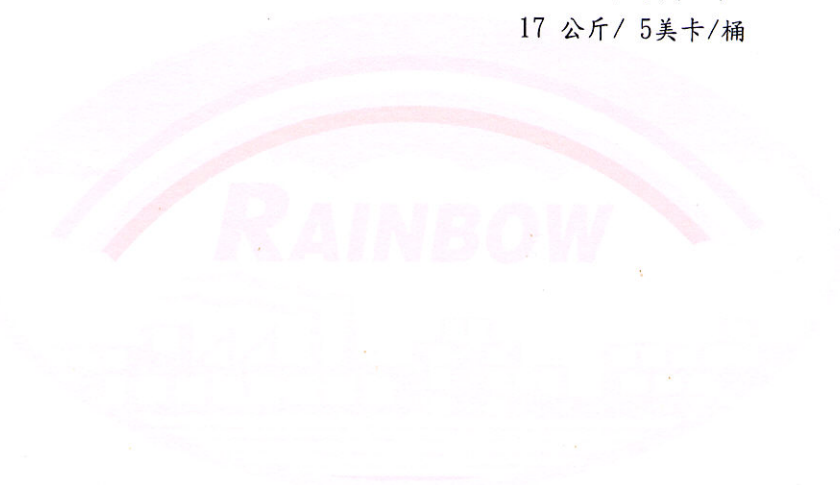


Material Handling :

1. Adhered moisture, grease, dirt, rust and corrosive salts on substrate must be cleaned thoroughly.
2. Mix base, hardener and zinc dust according to mixing ratio and stir thoroughly.
3. Avoid applying the paint in rainy weather or humidity above 85% RH, particularly, a wet surface must be thoroughly dried.
4. All equipments must be cleaned immediately after use.

注意事項:

1. 被塗物表面之水份, 油脂, 污泥, 灰塵等附著污物必須清除乾淨.
2. 主劑及硬化劑必須按規定比例混合後才可使用.
3. 陰雨或 RH大於 85% 以上時, 應避免施工.
4. 塗裝器具用完後應立即洗淨.

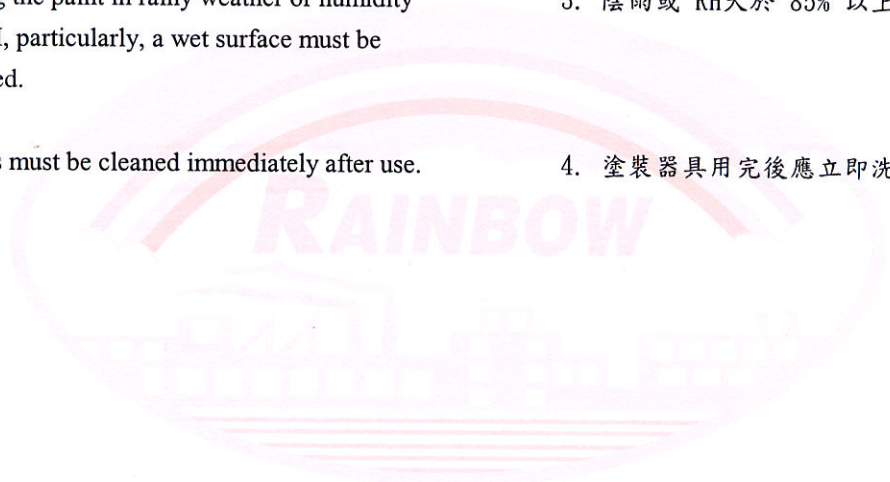

虹牌油漆

TAI HING HONG 大興行

Main Office:
G/F., 103 Shek Pai Wan Road, Aberdeen, Hong Kong
Tel.: (852) 2873 3078 Fax: (852) 2873 4953

Sheung Wan Office:
Unit 1906, 19/F., Bonham Trade Centre,
50 Bonham Strand East, Sheung Wan, Hong Kong
Tel.: (852) 2850 8518 Fax: (852) 2850 8515
Email: paints@taihinghong.biz.com.hk

