



# Flat Emulsion Paint

## 平光型水性水泥漆



**Product No. : 450**

**產品編號 : 450**

### General Description :

The waterborne emulsion paint based on the water and alkali resistance acrylic copolymer with the special pigment and additives.

### 一般說明 :

由耐水,耐鹼性非常優異之水性樹脂,配合遮蓋顏料及添加劑精製而成

### Uses :

Topcoat for interior walls of office building, hotel, public place, hospital, store, residence for the purpose of protection and decoration.

### 用途 :

辦公大樓,觀光飯店,公共場所,醫院,店舖,住宅等水泥,磚造物,石膏等內部構造物之防護,裝飾用面漆

### Characteristics :

1. Solvent is tap water, no pollution and flaming danger.
2. Thinning with tap water to lower the application expense.
3. Tough and hard film with smooth appearance.
4. Excellent resistance to moisture and alkalis.
5. Easy application.

### 特點 :

1. 使用清水為溶劑,無公害及引火危險
2. 以清水為調薄劑,可大幅降低施工費用
3. 具有平光外觀,塗膜堅固,外表美觀柔和
4. 耐水性,耐鹼性優良
5. 容易施工

### Color-Availability :

White and desired colors

### 可調配顏色:

白色及指定色

**Technical Data :****技術資料 :**

Finish 光澤		0-10% 平光
Weight 重量		above 1.3 Kg/L 1.3 公斤/公升 以上
Viscosity (25 °C) 黏度(25 °C)		80 ~ 110KU 80 ~ 110KU
Drying Time (25 °C) 乾燥時間 (25 °C)	Set-to-touch 指觸	1/2 hr 1/2 小時
	Dry hard 硬乾	2 hrs 2 小時
Optimum Film Thickness 漆膜厚度	Wet 濕膜	90 microns 90 微米
	Dry 乾膜	35 microns 35 微米
Overcoating Intervals (25 °C) 塗裝間隔 (25 °C)	Min. 最少	3 hrs 3 小時
Theoretical Coverage 理論塗佈量		42.0 m <sup>2</sup> / Gal, 11.1 m <sup>2</sup> / L, 8.5 m <sup>2</sup> / Kg 42.0 平方米/ 加侖, 11.1 平方米/ 公升 8.5 平方米/ 公斤
Storage Shelf Life 貯藏安定性		Minimum 1 year under normal storage conditions 正常情況下,至少1年



虹牌油漆

## TAI HING HONG 大興行

Main Office:  
G/F., 103 Shek Pai Wan Road, Aberdeen, Hong Kong  
Tel.: (852) 2873 3078 Fax: (852) 2873 4953

Sheung Wan Office:  
Unit 1906, 19/F., Bonham Trade Centre,  
50 Bonham Strand East, Sheung Wan, Hong Kong  
Tel.: (852) 2850 8518 Fax: (852) 2850 8515  
Email: paints@taihinghong.biz.com.hk





ISO 9001:2000  
Cert. No. 01 100 6507

### Application Data :

No. of Components : One  
No. of Coats : One~Two  
Dilution : 10 ~ 20% with tap water  
Preceding Coats : No. 410-1 Emulsion Paint, Primer  
Application Method : Spray, Brush, Roller

### 使用說明 :


組合成份數目 : 1  
塗施層面 : 1 ~ 2  
稀釋 : 10 ~ 20% 自來水  
適用底漆 : No.410-1 白色水性水泥底漆  
塗裝方法 : 噴塗, 刷塗, 滾塗

### Packing Style :

No. 450 Flat Emulsion Paint. 4.92 Kg/ USG/ Can  
24.60 Kg/ 5USG/ DR

### 包裝 :

No.450 平光型水性水泥漆 4.92 公斤/美卡/罐  
24.60 公斤/5美卡/桶

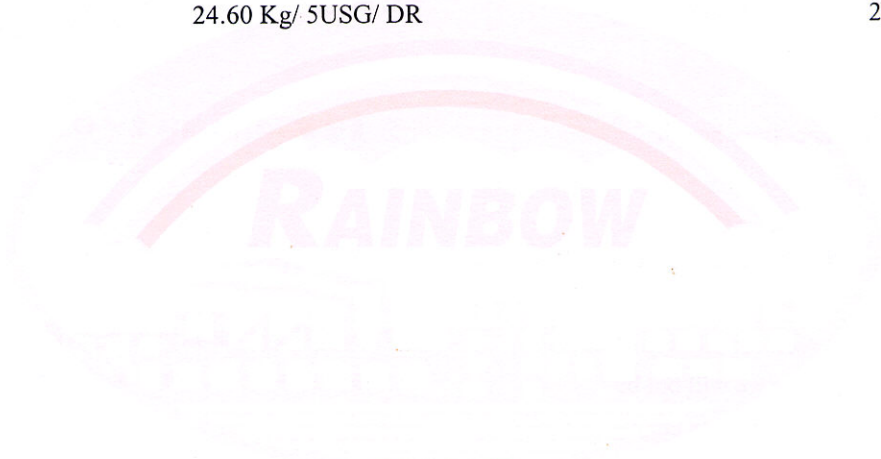

## Material Handling :

1. The moisture, grease, dirt, dust and other contaminants on applied surface must be cleaned thoroughly.
2. Before application, stir paint evenly, and when paint is too thick the tap water can be added within specified quantity.
3. Moisture and alkali will reduce film performance and adhesion, therefore, moisture content of new constructed cement walls should be under 12%. If not, the application has to wait for 2 or 3 weeks until the walls is dry completely.
4. The Rainbow color toners or emulsion paints are specified for thinning, if required.
5. For spray application the necessary health precautions must be observed.
6. Ensure adequate ventilation during application.
7. If an alternative thinner is used for dilution other than our recommended thinner we will not be liable for any complications or defects arising from the usage of this material.

## 注意事項 :

1. 被塗物表面之油脂,灰塵,水份及其他附著物,必須清除乾淨才能施工
2. 使用前必須充分攪拌,太稠時,可酌加自來水調薄,但以不超過規定量為原則
3. 新水泥牆壁因含有水份與游離鹼性物質,必將降低漆膜性能與附著性,必須等 2~3 星期,待其完全乾燥後,水份值在12%以下,始可施工
4. 調色時請用虹牌水性色素
5. 噴塗施工時,必須注意一切安全措施
6. 在施工時保證足夠空氣流通
7. 如稀釋劑非由我們推薦的,我們將不會保證任何有關使用上所引至的後果及缺點



虹牌<sup>®</sup>油漆

## TAI HING HONG 大興行

Main Office:  
G/F., 103 Shek Pai Wan Road, Aberdeen, Hong Kong  
Tel.: (852) 2873 3078 Fax: (852) 2873 4953

Sheung Wan Office:  
Unit 1906, 19/F., Bonham Trade Centre,  
50 Bonham Strand East, Sheung Wan, Hong Kong  
Tel.: (852) 2850 8518 Fax: (852) 2850 8515  
Email: paints@taihinghong.biz.com.hk

