



High Red Lead Primer

船用紅丹漆



Product No. : OP-91

產品編號 : OP-91

General Description :

Anti-corrosive paint based on alkyd and special resins with high red lead content.

一般說明 :

由醇酸樹脂, 特殊樹脂及高成份構成之防銹漆。

Uses :

Anti-corrosive under coat for topsides, steel decks, superstructures and weathering steel parts.

用途 :

船邊, 甲板, 船上構物, 及輕度於曝露之鋼鐵機件用防銹底漆。

Characteristics :

1. Fast drying with good adhesion.
2. Very good rust preventive properties.
3. Good resistance to sea water and oil.
4. Easy application.

特點 :

1. 乾燥迅速, 附着力強。
2. 防銹性能極佳。
3. 耐海水性及耐油性優良。
4. 容易施工。

Color-Availability :

Orange

可調配顏色 :

橙紅色

Technical Data :

Finish

光澤

Weight

重量

Viscosity (25 °C)

黏度 (25 °C)

Drying Time (25 °C)

乾燥時間 (25 °C)

Optimum Film Thickness

漆膜厚度

Overcoating Intervals (25 °C)

塗裝間隔(25 °C)

Theoretical Coverage

理論塗佈量

Solid by Volume

固體容積

Storage Shelf Life

貯藏安定性

技術資料:

Flat

平光

Above 1.6 Kg/L

1.6 公斤/公升以上

70 ~ 85 KU (mixture)

70 ~ 85 KU (混合物)

Set-to-touch

1 hrs

指觸

1 小時

Dry hard

6 hrs

硬乾

6 小時

Wet

83 microns

濕膜

83 微米

Dry

40 microns

乾膜

40 微米

Min.

16 hrs

最少

16 小時

Max.

3 months

最多

3 個月

12.0 m²/L, 7.5 m²/kg

12.0 平方米/公升, 7.5 平方米/公斤

48%

48%

Minimum 1 year under normal storage conditions.

正常情況下,至少1年.

**TAI HING HONG 大興行**

Main Office:
G/F., 103 Shek Pai Wan Road, Aberdeen, Hong Kong
Tel.: (852) 2873 3078 Fax: (852) 2873 4953

Sheung Wan Office:
Unit 1906, 19/F., Bonham Trade Centre,
50 Bonham Strand East, Sheung Wan, Hong Kong
Tel.: (852) 2850 8518 Fax: (852) 2850 8515
Email: paints@taihinghong.biz.com.hk

**虹牌油漆**



ISO 9001:2000
Cert. No. 01 100 6507

Application Data :

No. of Components : One

No. of Coats : One

Dilution : 0 ~ 5% (by wt.)
OM-07 Thinner

Preceding Coats : SP-01 : Blast Primer
SP-04 : Epoxy Zinc Rich Primer, SP
SP-05 : Blast Primer, EP
SP-08 : Non-Zinc Shop Primer
SP-09 : Epoxy Cathozinc Shop Primer, Type 2

Subsequent Coats : Oleoresinous topcoats

Application Method : Airless Spray, Brush, Roller

使用說明:

組合成份數目 : 1

塗施層面 : 1

稀釋 : 0 ~ 5% (重量比)
OM-07 松香水

適用底漆 : SP-01 : 長曝型伐銹底漆
SP-04 : 永保新鋅粉底漆, SP
SP-05 : 伐銹底漆, EP
SP-08 : 非鋅粉預塗底漆
SP-09 : 無機鋅粉預塗底漆, Type 2

適用面漆 : 油性樹脂面漆

塗裝方法 : 無氣噴塗, 刷塗, 滾塗.

Packing Style :

OP-91 High Red Lead Prime 6.0 Kg/ USG/ Can
30.0 Kg/ 5USG/ Drum

包裝:


OP-91 船用紅丹漆 6.0公斤/美卡/罐
30.0公斤/5美卡/桶

Material Handling :

1. Before application, stir paint evenly, and when paint is too thick the tap water can be added within specified quantity.
2. Moisture, grease, sludge, old paint and rust must be thoroughly removed from substrate.
3. When substrate is damp with dew or during rainy weather painting must be suspended.

注意事項:

1. 使用前必須充分攪拌, 太稠時, 可酌加自來水調薄, 但以不超過規定量為原則
2. 被塗物表面水份, 油脂, 污泥, 灰塵, 鐵銹及腐蝕性鹽類等附著物必須清除乾淨.
3. 表面潮濕, 凝結有露水或在陰雨天時, 應避免施工.

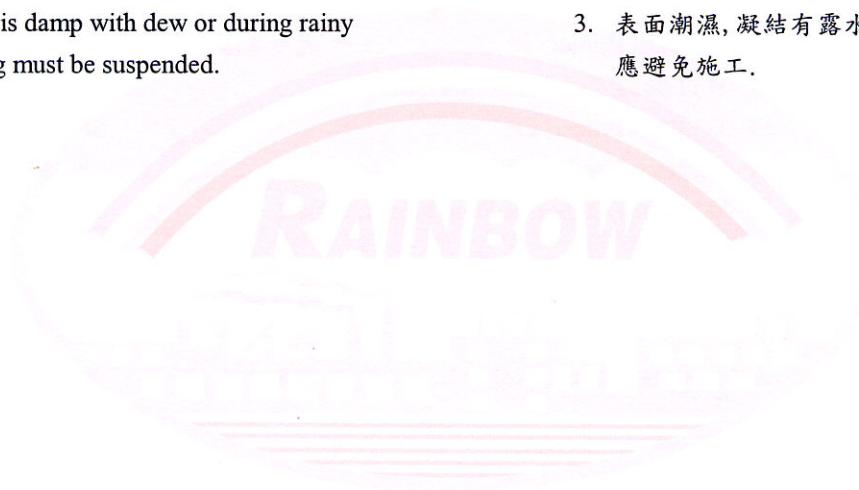

虹牌®油漆

TAI HING HONG 大興行

Main Office:
G/F., 103 Shek Pai Wan Road, Aberdeen, Hong Kong
Tel.: (852) 2873 3078 Fax: (852) 2873 4953

Sheung Wan Office:
Unit 1906, 19/F., Bonham Trade Centre,
50 Bonham Strand East, Sheung Wan, Hong Kong
Tel.: (852) 2850 8518 Fax: (852) 2850 8515
Email: paints@taihinghong.biz.com.hk

