



Rainbow Chlor Rubber A/C (CR A/C)



橡膠一度船底防銹漆

Product No. : RA-11

產品編號 : RA-11

General Description :

Anti-corrosive paint based on chlorinated rubber and aluminium pigment.

一般說明 :

由氯化橡膠及鋁粉顏料構成的船底防銹漆。

Uses :

Anti-corrosive undercoat for ship bottom, boottop, and topside areas.

用途 :

船艙, 船底, 水線及船邊部位用防銹底漆。

Characteristics :

1. Very fast drying with very good adhesion.
2. Very good weather resistance.
3. Very good resistance to sea water and oil.
4. Very good resistance to mechanical damage.
5. Good resistance to galvanic action.

特點 :

1. 乾燥極速, 附着力極強.
2. 耐候性極優.
3. 耐海水及耐油性極優.
4. 耐機械磨損性極優.
5. 耐電蝕性優良.

Color-Availability :

Silver, Reddish Silver

可調配顏色 :

銀色, 銀紅色

Technical Data :Finish
光澤Weight
重量Viscosity (25 °C)
黏度 (25 °C)Drying Time (25 °C)
乾燥時間 (25 °C)Optimum Film Thickness
漆膜厚度Overcoating Intervals (25 °C)
塗裝間隔 (25 °C)Theoretical Coverage
理論塗佈量Solid by Volume
固體容積Storage Shelf Life
貯藏安定性**技術資料 :**Flat
平光Above 1.2 Kg/L
1.2 公斤/公升以上70 ~ 85 KU
70 ~ 85 KUSet-to-touch
指觸 1/2 hr
1/2 小時Dry hard
硬乾 2 hrs
2 小時Wet
濕膜 100 microns
100 微米Dry
乾膜 40 microns
40 微米Min.
最少 3 hrs
3 小時10.0 m²/L, 8.3 m²/kg
10.0 平方米/公升, 8.3 平方米/公斤40%
40%Minimum 1 year under normal storage conditions.
正常情況下,至少1年.**TAI HING HONG 大興行**Main Office:
G/F., 103 Shek Pai Wan Road, Aberdeen, Hong Kong
Tel.: (852) 2873 3078 Fax: (852) 2873 4953Sheung Wan Office:
Unit 1906, 19/F., Bonham Trade Centre,
50 Bonham Strand East, Sheung Wan, Hong Kong
Tel.: (852) 2850 8518 Fax: (852) 2850 8515**虹牌 油漆**



ISO 9001:2000
Cert. No. 01 100 6507

Application Data :

No. of Components : One

No. of Coats : One

Dilution : 0~5% (by wt)
No. RP-71 PRC Thinner

Preceding Coats : SP-01 Blast Primer
SP-04 Epoxy Zinc Rich Primer, SP
SP-08 Epoxy Non-Zinc Shop Primer
SP-09 Cathozinc, Shop Primer,
Type-2.

Subsequent Coats : Chlorinated Rubber or Oleoresinous
topcoats for exterior hull

Application Method : Airless Spray, Brush, Roller

使用說明 :

組合成份數目 : 1

塗施層面 : 1

稀釋 : 0~5% (重量比)
RP-71 橡膠調薄劑.

適用底漆 : SP-01 長曝型伐銹底漆.
SP-04 永保新鋅粉底漆, SP.
SP-08 非鋅粉預塗底漆.
SP-09 無機鋅粉預塗底漆,
Type 2.

適用面漆 : 氯化橡膠或油性樹脂
系船舶面漆.

塗裝方法 : 無氣噴塗, 刷塗, 滾塗

For Airless Spray : Tip Size : 0.019" ~ 0.023"
: Air Pressure : 5 ~ 6 kg/cm²
: Pump Ratio : 23 : 1 or Greater

無氣噴塗要求 : 噴嘴尺寸: 0.019"~0.023"
二次空氣壓力: 5~6 kg/cm²
壓縮比 : 23:1或更大

Packing Style :

RA-11 Rainbow Chlor Rubber A/C 4.54 Kg/ USG/ Can
(CR A/C) 22.71 Kg/ 5USG/ DR

包裝 :


RA-11 橡膠一度船底防銹漆 4.54 公斤/美卡/ 罐
22.7 公斤/5美卡/ 桶

Material Handling :

1. For spray application the necessary health precautions must be observed.
2. Ensure adequate ventilation during application.
3. Keep away from heat sources.
4. If an alternative thinner is used for dilution other than our recommended thinner we will not be liable for any complications or defects arising from the usage of this material.

注意事項 :

1. 噴塗施工時,必須注意一切安全措施.
2. 在施工時保證足夠空氣流通.
3. 遠離熱源.
4. 如稀釋劑非由我們推薦的,我們將不會保證任何有關使用上所引至的後果及缺點.

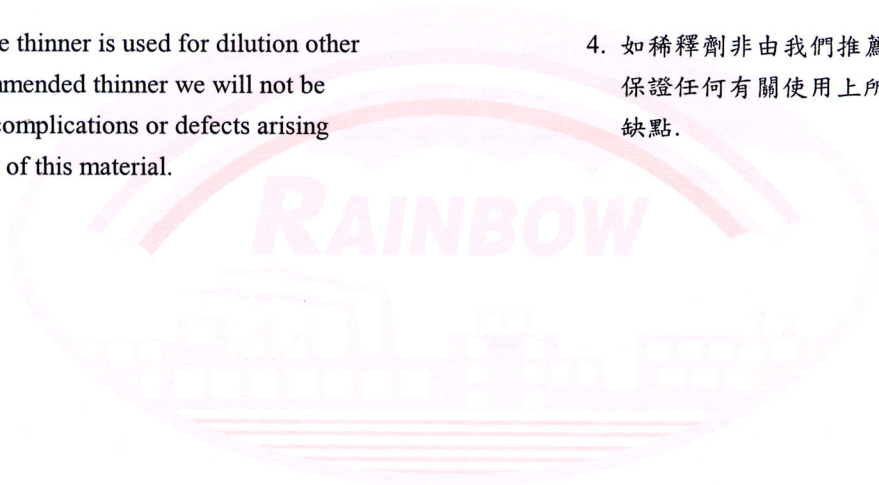

虹牌油漆

TAI HING HONG 大興行

Main Office:
G/F., 103 Shek Pai Wan Road, Aberdeen, Hong Kong
Tel.: (852) 2873 3078 Fax: (852) 2873 4953

Sheung Wan Office:
Unit 1906, 19/F., Bonham Trade Centre,
50 Bonham Strand East, Sheung Wan, Hong Kong
Tel.: (852) 2850 8518 Fax: (852) 2850 8515

