



## Rainbow Chlor Rubber Primer, Red Lead



### 橡膠紅丹防銹底漆

**Product No. : RP-63**

**產品編號 : RP-63**

#### **General Description :**

Anti-corrosive paint based on Chlorinated Rubber with red lead pigment.

#### **一般說明 :**

由氯化橡膠及紅丹顏料構成之防銹漆。

#### **Uses :**

Anti-corrosive under coat for topsides areas, steel decks, superstructures and weathering steel structure for petrochemical facilities, oil refineries and coastal facilities.

#### **用途 :**

船邊, 甲板, 船上結構物, 及曝露於石化廠, 煉油廠, 岸邊設施之鋼構機件用經濟型防蝕底漆。

#### **Characteristics :**

1. Very fast drying.
2. Very good rust preventive property.
3. Very good adhesion and weather resistance.
4. Good resistance to mechanical damage.
5. Good resistance to oils and sea water.

#### **特點 :**

1. 乾燥極速.
2. 防銹力強.
3. 附著力及耐候性極優.
4. 耐機械磨損性優良.
5. 耐油性及耐海水性優良.

#### **Color-Availability :**

Orange

#### **可調配顏色 :**

橙紅色

**Technical Data :**

Finish

光澤

Weight

重量

Viscosity (25 °C)

黏度 (25 °C)

Drying Time (25 °C)

乾燥時間 (25 °C)

Optimum Film Thickness

漆膜厚度

Overcoating Intervals (25 °C)

塗裝間隔 (25 °C)

Theoretical Coverage

理論塗佈量

Solid by Volume

固體容積

Storage Shelf Life

貯藏安定性

**技術資料 :**

Flat

平光

Above 1.45Kg/L

1.45公斤/公升以上

70 ~ 85 KU

70 ~ 85 KU

Set-to-touch

1/2 hr

指觸

1/2 小時

Dry hard

3 hrs

硬乾

3 小時

Wet

100 microns

濕膜

100 微米

Dry

40 microns

乾膜

40 微米

Min.

4 hrs

最少

4 小時

10.0 m<sup>2</sup>/L, 6.9 m<sup>2</sup>/kg

10.0 平方米/公升, 6.9平方米/公斤

40%

40%

Minimum 1 year under normal storage conditions

正常情況下,至少1年

**TAI HING HONG 大興行**

Main Office:  
G/F., 103 Shek Pai Wan Road, Aberdeen, Hong Kong  
Tel.: (852) 2873 3078 Fax: (852) 2873 4953

Sheung Wan Office:  
Unit 1906, 19/F., Bonham Trade Centre,  
50 Bonham Strand East, Sheung Wan, Hong Kong  
Tel.: (852) 2850 8518 Fax: (852) 2850 8515  
Email: paints@taihinghong.biz.com.hk

**虹牌油漆**



ISO 9001:2000  
Cert. No. 01 100 6507

### Application Data :

No. of Components	: One
No. of Coats	: One
Dilution	: 0~5% (by wt) No. RP-71 PRC Thinner.
Preceding Coats	: SP-01 Blast Primer SP-04 Epoxy Zinc Rich Primer, SP SP-08 Epoxy Non-Zinc Shop Primer SP-09 Cathozinc, Shop Primer, Type-2
Subsequent Coats	: Chlorinated Rubber or Oleoresinous topcoats
Application Method	: Airless Spray, Brush, Roller
For Airless Spray	: Tip Size : 0.019" ~ 0.021" : Air Pressure : 5 ~ 6 kg/cm <sup>2</sup> : Pump Ratio : 23 : 1 or Greater

### 使用說明 :

組合成份數目	: 1
塗施層面	: 1
稀釋	: 0~5% (重量比) No. RP-71 橡膠調薄劑.
適用底漆	: SP-01 長曝型伐銹底漆. SP-04 永保新鋅粉底漆, SP. SP-08 非鋅粉預塗底漆. SP-09 無機鋅粉預塗底漆, Type2.
適用面漆	: 氯化橡膠或油性樹脂面漆.
塗裝方法	: 無氣噴塗, 刷塗, 滾塗.
無氣噴塗要求	: 噴嘴尺寸: 0.019"~0.021" 二次空氣壓力: 5~6kg/cm <sup>2</sup> 壓縮比 : 23:1 或更大

### Packing Style :

RP-61 Rainbow Chlor Rubber Primer	5.48Kg/USG/Can
Hign Red Lead	27.44Kg/5USG/DR

### 包裝 :


RP-61 橡膠紅丹漆	5.48公斤/美卡/罐
	27.44公斤/5美卡/桶

### Material Handling :

1. For spray application the necessary health precautions must be observed.
2. Ensure adequate ventilation during application.
3. Keep away from heat sources.
4. If an alternative thinner is used for dilution other than our recommended thinner we will not be liable for any complications or defects arising from the usage of this material.

### 注意事項 :

1. 噴塗施工時, 必須注意一切安全措施.
2. 在施工時保證足夠空氣流通.
3. 遠離熱源.
4. 如稀釋劑非由我們推薦的, 我們將不會保證任何有關使用上所引至的後果及缺點.

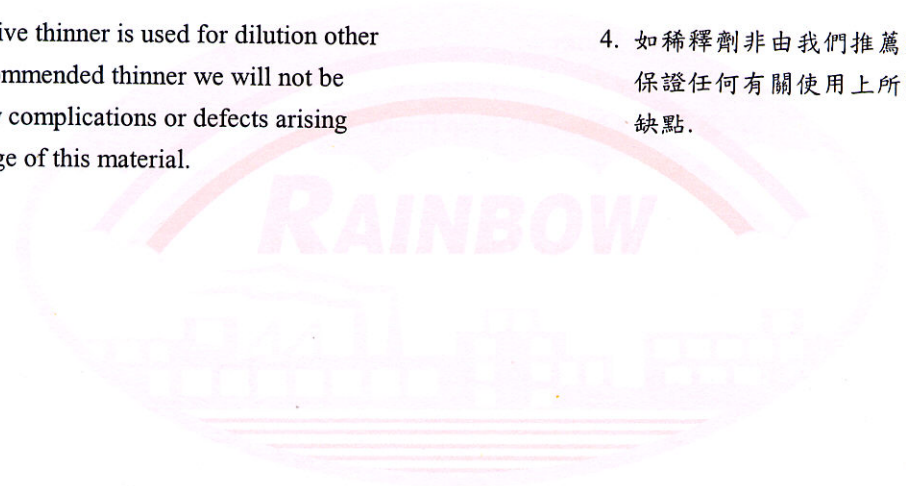

虹牌油漆

## TAI HING HONG 大興行

Main Office:  
G/F., 103 Shek Pai Wan Road, Aberdeen, Hong Kong  
Tel.: (852) 2873 3078 Fax: (852) 2873 4953

Sheung Wan Office:  
Unit 1906, 19/F., Bonham Trade Centre,  
50 Bonham Strand East, Sheung Wan, Hong Kong  
Tel.: (852) 2850 8518 Fax: (852) 2850 8515  
Email: paints@taihinghong.biz.com.hk

