



Supermarine

(Synthetic Enamel) 船面漆(磁漆)



Product No. : SP-65

產品編號 : SP-65

General Description :

A finish paint based on long oil alkyd resin with weather resistant pigments.

一般說明 :

由長油性醇酸樹脂, 及耐候性顏料構成之面漆.

Uses :

Topcoat for superstructures, steel structures, deck fittings, interior rooms and woodworks.

用途 :

船上構物, 鋼鐵構造物, 甲板配件, 內部艙房及木器類用面漆或曝露輕度無腐蝕環境用之面漆.

Metal, woodenware, machinery vehicles and steel structure surfaces.

一般鐵材, 木製品, 機械設施, 車輛及鋼鐵構造物等之面塗用漆.

Characteristics :

1. Good appearance and gloss retention.
2. Good weather and abrasion resistance.
3. Good adhesion to oleoresinous and chlorinated rubber primers.
4. Capable of with-standing temperature up to 80°C (176°F).
5. Good resistance to sea water and oils.
6. Easy application.

特點 :

1. 外表美觀, 保光澤力強.
2. 耐磨性, 耐候性優良.
3. 與油性底漆及橡膠性底漆之附著力強.
4. 能耐熱至80°C (176°F).
5. 耐油性及耐海水性優良.
6. 容易施工.

Color-Availability :

White and desired colors

可調配顏色 :

白色及指定色

Technical Data :

Finish

光澤

Weight

重量

Viscosity (25°C)

黏度(25°C)

Drying Time (25 °C)

乾燥時間 (25 °C)

Optimum Film Thickness

漆膜厚度

Overcoating Intervals (25 °C)

塗裝間隔 (25 °C)

Theoretical Coverage

理論塗佈量

Solid by Volume

固體容積

Storage Shelf Life

貯藏安定性

技術資料 :

Gloss

有光

1.1Kg/L depending on colors

1.1公斤/公升 因色而異

70 ~ 85 KU

70 ~ 85 KU

Set-to-touch

指觸

3 hrs

3 小時

Dry hard

硬乾

15 hrs

15 小時

Wet

濕膜

70 microns

70 微米

Dry

乾膜

35 microns

35 微米

Min.

最少

24 hrs

24 小時

14.3 m²/ L, 13.0 m²/ kg

14.3 平方米/公升, 13.0平方米/公斤

50%

50%

Minimum 1 year under normal storage conditions

正常情況下,至少1年

**TAI HING HONG 大興行**

Main Office:
G/F., 103 Shek Pai Wan Road, Aberdeen, Hong Kong
Tel.: (852) 2873 3078 Fax: (852) 2873 4953

Sheung Wan Office:
Unit 1906, 19/F., Bonham Trade Centre,
50 Bonham Strand East, Sheung Wan, Hong Kong
Tel.: (852) 2850 8518 Fax: (852) 2850 8515
Email: paints@taihinghong.biz.com.hk



No. SP-65
虹牌油漆

**Application Data :**

No. of Components : One

No. of Coats : One~Two

Dilution : 0~5% (by wt.)
No. OM-07 Paint Thinner.

Preceding coats : OP-91 High Red Lead Primer.
OP-92 Red Lead Primer.
OP-93 Zinc Chromate Primer.
OP-94 LZI Primer.
OP-94-1 LZI Primer, HB.
OP-95 Red Oxide Primer.

Application Method : Airless Spray, Brush, Roller.

For Airless Spray : Tip Size : 0.015" ~ 0.019"
: Air Pressure : 4 ~ 5 kg/cm²
: Pump Ratio : 23 : 1 or Greater

使用說明 :

組成份數目 : 1

塗施層面 : 1~2

稀釋 : 0~5% (重量比)
No.OM-07 松香水.

適用底漆 : OP-91 船用紅丹底漆.
OP-92 紅丹防銹底漆.
OP-93 鋅鉻黃防銹底漆.
OP-94 鋅鉻鐵鉛底漆.
OP-94-1 鋅鉻鐵鉛底漆, 厚塗.
OP-95 鎊色防銹漆.

塗裝方法 : 無氣噴塗, 刷塗, 滾塗

無氣噴塗要求 : 噴嘴尺寸 : 0.015"~0.019"
: 二次空氣壓力 : 4 ~ 5 kg/cm²
: 壓縮比 : 23 : 1 或更大

Packing Style :

SP-65 Supermarine 4.16Kg/USG/Can
20.82Kg/5USG/DR

包裝 :


SP-65 船面漆 4.16 公斤/美卡/罐
20.82 公斤/5美卡/桶

Material Handling :

1. For spray application the necessary health precautions must be observed.
2. Ensure adequate ventilation during application.
3. Keep away from heat sources.
4. If an alternative thinner is used for dilution other than our recommended thinner we will not be liable for any complications or defects arising from the usage of this material.

注意事項 :

1. 噴塗施工時,必須注意一切安全措施.
2. 在施工時保證足夠空氣流通.
3. 遠離熱源.
4. 如稀釋劑非由我們推薦的,我們將不會保證任何有關使用上所引至的後果及缺點.

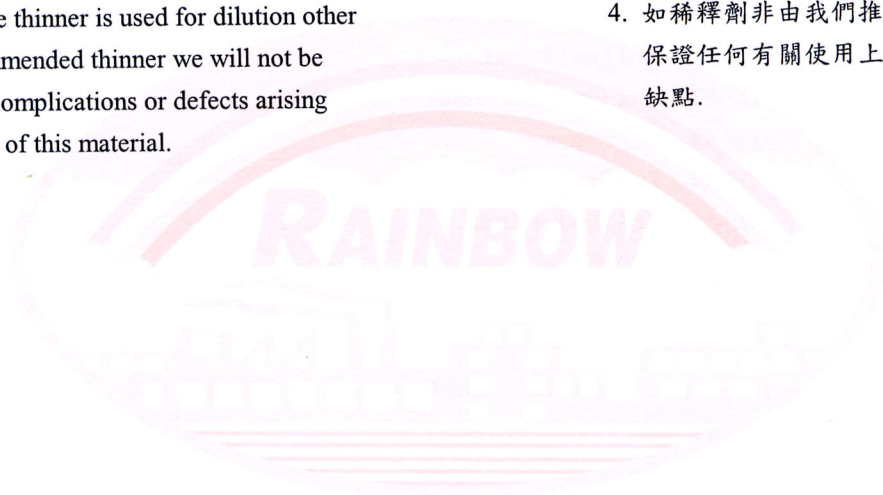

虹牌油漆

TAI HING HONG 大興行

Main Office:
G/F., 103 Shek Pai Wan Road, Aberdeen, Hong Kong
Tel.: (852) 2873 3078 Fax: (852) 2873 4953

Sheung Wan Office:
Unit 1906, 19/F., Bonham Trade Centre,
50 Bonham Strand East, Sheung Wan, Hong Kong
Tel.: (852) 2850 8518 Fax: (852) 2850 8515
Email: paints@taihinghong.biz.com.hk

